

Vcenter - 205

Pendulum Machining

High Versatility

- Long Fixed Table accommodates heavier loads and long parts.
- Traveling column with X-axis travel 2050 mm provides excellent access to work area.
- Easy installation for rotary tables or hydraulic fixtures.

High Productivity

- Rapid feeds 30 m/min (X/Y/Z) reduce tool changeover time.
- Directly Coupled Spindle avoids belt vibration for better finish.
- Central Partition enables higher production than VMC with 2-pallet APC.



Highest Productivity And

Designed by following extensive research and feedback from numerous machine tool users, Victor's new Vcenter-205 has been designed with a long fixed table to provide multi-tasking machining precision with 30 m/min rapid traverse in all axes. The traveling column enables pendulum loading and machining in cycle to reduce load/unload times and to maximize spindle utilization.



Directly-coupled Spindle (DCS) with high torque spindle motor

- Spindle motor is directly coupled to the spindle to avoid the vibration resulted from belts and enhance surface finish on components.
- 12000 rpm spindle speed with dual winding for high torque output implements high speed machining at high feed rate.
- Oil-air lubrication with filtration system is used for spindle bearing.
- Air curtain has been added to constantly give the spindle an extra coat of protection.

Spindle oil cooler (Optional)

- While the spindle structure is built for the maximum rigidity, the spindle oil cooler can be installed optional to ensure the long bearing life.
- Cooling oil circulates around the spindle cartridge constantly to maintain the low temperature during the spindle rotation.




High rigidity dynamic structure

- Heavy-duty Meehanite® castings from Victor's licensed Meehanite foundry are used in the bed and column for maximum damping and strength.
- One piece bed castings with a heavily ribbed column minimizes machine distortion.
- CAE (computer aided engineering) design results in a maximum stiffness to ensure the minimum overhang distortion for all Y-axis traveling range 550 mm.


Column-mounted tool magazine and arm type ATC

- Tool magazine moving with column reduces the tool exchange time and ensures tools and kept out of machining area and free of swarf.
- Two arm type ATC offers quick tool changeover time and optimal reliability.
- BT-40 tooling with updated pull stud JIS-40P upgrades the cutting capability than conventional BT-40 tooling.

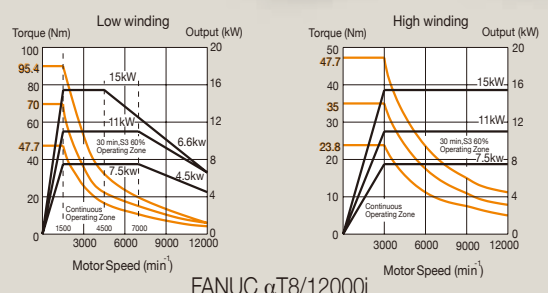

FANUC αT8/12000i

Reliability

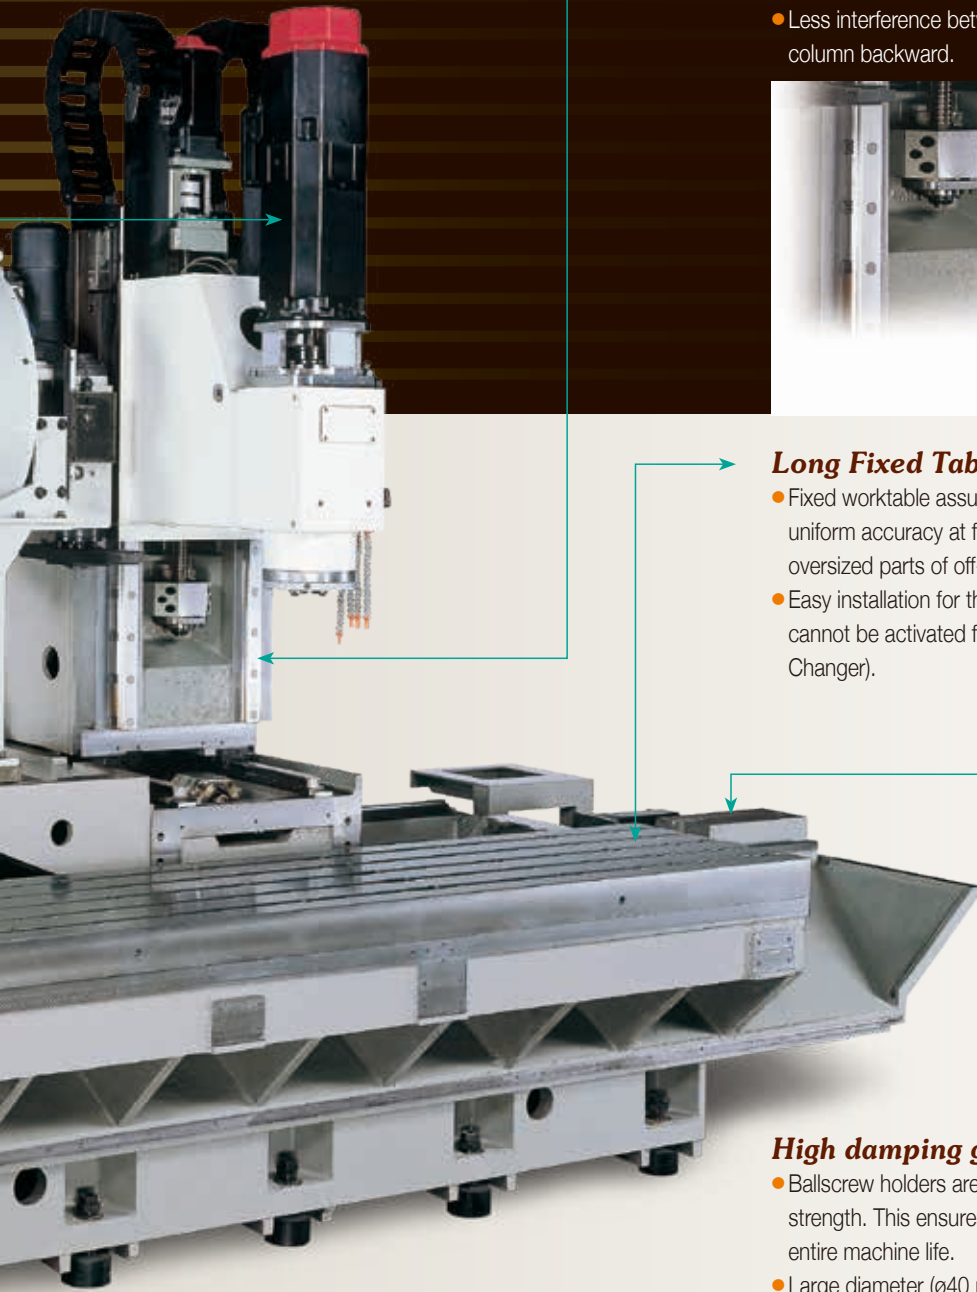

Traveling Column with 30 m/min rapid feed

- C-framed traveling column features easy access to load/unload the components.
- Rapid feed rate 30/30/30 m/min for 3 axes with scissor type telescopic guarding reduces spindle idle time with reliable quality guaranteed.
- Less interference between tool magazine and working area by moving the column backward.



Long Fixed Table

- Fixed worktable assures the evenly distributed loading and features for uniform accuracy at full stroke of X-axis travel 2050 mm even when oversized parts of off-center parts are loaded.
- Easy installation for the 4th axis rotary tables or hydraulic fixtures which cannot be activated for conventional VMC with 2 pallet APC (Auto Pallet Changer).



High damping guide ways with high stiffness

- Ballscrew holders are cast into the machine for even more rigidity and strength. This ensures a constant support for the ballscrews over the entire machine life.
- Large diameter (ø40 mm) ball screws and big size linear guides (width 45 mm) with retainer (model SHS) ensure the high structure stiffness during machining.
- Direct coupled servo motors eliminate motor backlash and noise caused by misalignment.

Victor NC Package

- Fanuc 0iMF Plus (10.4", type-1) control with MGI and AICC-2 (200 blocks) meets various machining requirement.
- Heidenhain TNC-620/640 controls with user-friendly conversational function to meet mold manufacturing requirement.



High Versatility Through A Wide Range Of Set-ups

With a central partition guarding installed, the Vcenter-205 can effectively be turned into two smaller vertical machining centers, machining on one side while loading or unloading parts on the other side.



Two-door design

Pendulum machining by Central Partition System

- With the central partition guarding installed, the spindle can effectively machine on one side while loading or unloading parts on the other side.
- X-axis travel limit is automatically set up by interlock when partition guarding installed, and the machining area are split into the right and left area.
- The interlock function assures safe setup for one side while machining is made in the other side.
- Central Partition System features higher productivity than that of vertical machining center equipped with a 2-pallet APC.


Easy installation for the 4th/5th axis tables and fixtures

- With a central partition guarding installed, the long table can be mounted with two fixtures or two CNC controlled tables.
- No complicated wiring and cabling involved as the conventional VMC with 2-pallet APC, the fixed table facilitates the ultimate reliability and much heavier loading on the tables.
- Rapid traverse speed 30 m/min by traveling column further offers much higher productivity than conventional VMC with 2-pallet APC.


Advantages of Long Fixed Table with Traveling Column




Full Table
with one part loaded




Full Table
with many parts loaded

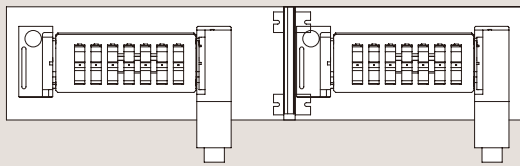

Split Table
with two identical parts loaded for two different operations




Split Table
with two identical set-ups for the same operations
(with or without rotary tables or fixtures)

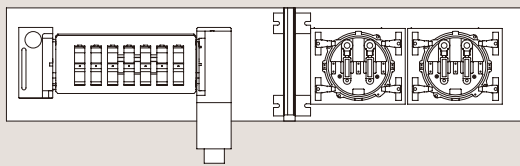


Split Table
with two different setups for two different operations.

Optimized design for part loading

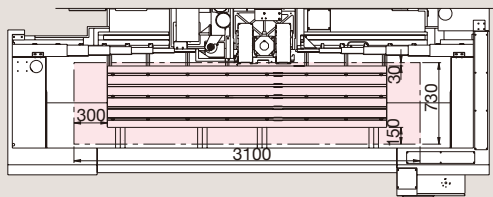


Loading from the top

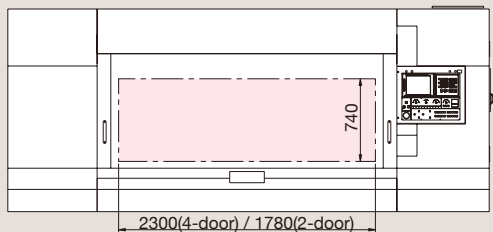


Loading from the front

Maximum machining range

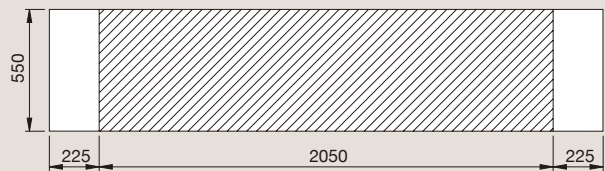

Partition guarding is removed

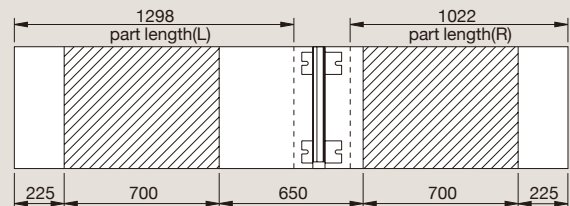


Partition guarding is installed

Options




32 or 40 tool magazine

Optional 32 (or 40) servo driven tool magazine enables pendulum machining on two split tables for different set-ups or two different applications.

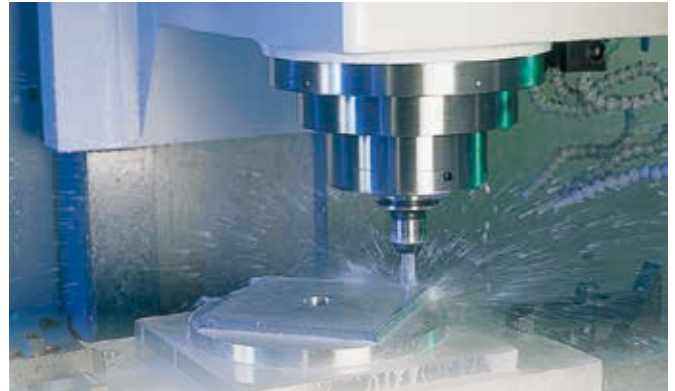

Coolant Through Spindle (CTS)

For improved deep hole drilling and boring capability, coolant can be forced through the center of the spindle under the high pressure (20 bars/60Hz by Grundfos pump MTR 3-23) directly to the cutting area. To ensure long and reliable running of this system, fine particles produced during machining must be filtered out to prevent damage to the spindle. Victor's customized cleaning system by centrifugal dispersion or replaceable filter cores is far more reliable with less maintenance than conventional system to avoid the fine particles flowing into the spindle.

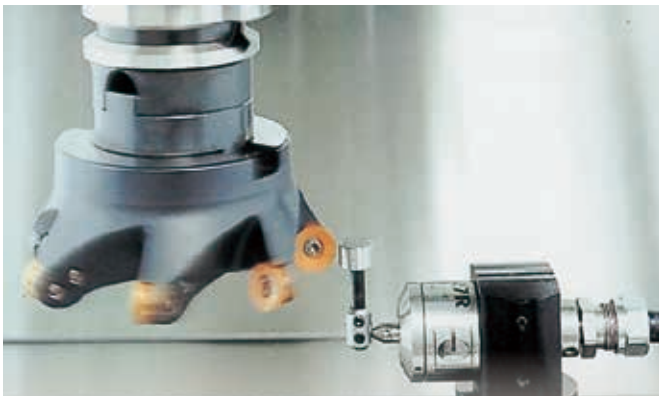

Stop block for oil hole coolant

As an alternative to CTS, it is possible to supply coolant through the tool holder by using an adaptor (stop block) located on the spindle nose. High pressure (coolants) can be supplied with no need for higher cost filter system as coolant bypassed the spindle.

Auto tool length measurement

To reduce tool set-up time, Victor offers two automatic tool length measuring systems:

- Simple tool length measurement

Metrol system T-24E is mostly used for tapping and drilling as the probe only measures the tool length.

- Advance tool length measurement

Renishaw system TS-27R offers further advancement with the probe capable of measuring both tool lengths and diameters. This system is ideal for batch production where tools need to be constantly changed or replaced.



Linear scales for improved repeatability

Linear scales offer exceptional positioning accuracy up to 0.005mm over full stroke. Heidenhain or Fagor linear scales with a thermal behavior similar to that of the machine are selected to compensate for the thermal expansion and to enhance repeatability. Sealed encoders with durable Aluminum housing offer improved reliability and service life.

Coolant Options


Std. - coolant ring
Purpose - general

Opt. - directional pipe
Purpose - general

Opt. - oil hole coolant
Purpose - drilling, boring

Opt. - thru. spindle coolant
Purpose - drilling, boring

Opt. - oil mist
Purpose - tapping, reaming

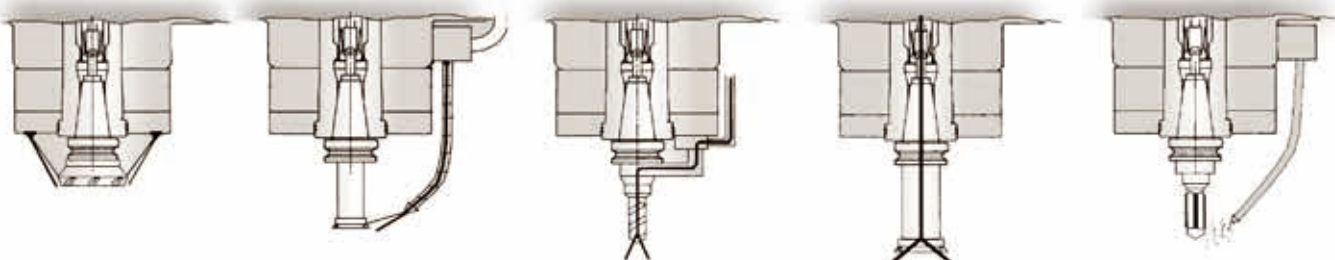

4th/5th axis CNC rotary or tilting tables

Making the full use of the long fixed table feature, CNC rotary tables can be easily installed to improve the application range. Four axes simultaneous machining for multiple faces can be realized with a single set-up. The 5th axis table is also available with tilting as well as rotary function, Fanuc 31i-B5 Plus or Heidenhain TNC-640 controls will be required for 5 axis simultaneous machining.



Workpiece measurement

To reduce time spent setting workpiece positions and then manually inspecting finished parts, automatic workpiece measurement is available with the use of Renishaw MP-10 or OMP-60 measuring probes. The workpiece position can be identified with the probe and work offsets automatically updated, enabling parts to be made right first time. During batch production, in-process checking can be performed on the machine to maintain tight tolerance after rough machining.




Non-central Partition System

In case the central partition guarding is required to be located in different location for different setups, the partition guarding can also be re-located with the guarding options. However, two doors and the according moving stroke are unchanged to avoid any possibility for coolant leakage.





Higher power spindle

To meet heavier cutting requirement, the DCS spindle can be upgraded to higher power spindle motor or higher speed spindle.



Fanuc alpha 18/15000i

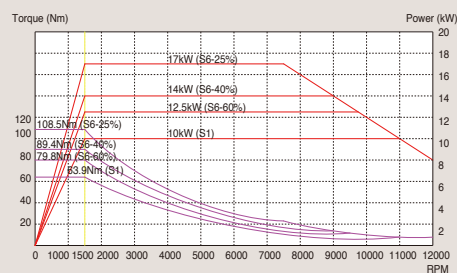

Heidenhain motor QAN200UH

VICTOR Taichung's NC PACKAGE

Standard Accessories

New Fanuc Oi-MF Plus (type-1) control includes:

- 10.4" screen
- AICC-2 (200 blocks)
- QWERTY keyboard
- 2GB CF card
- Manual Guide i (MGI)
- VSS Macros (Victor's GUI)

VSS (Victor Software System) Macros


With exclusive software developed in-house by highly experienced engineers, VSS macros (Victor GUI), which is included when the controller is upgraded with 10.4" monitor, enhance not only machine operation to reduce tool set-up time but also safety features to protect costly spindle. Productivity can be further increased when the adaptive controlled cutting is implemented.



Victor Taichung's GUI "VSS macros"



Tool breakage detection



Alarm display with diagnosis



Tool management



Tool management

Heidenhain TNC-620/640 control

Powerful dialog programming with fully alphanumeric keyboard, Heidenhain control is also available. Without remembering complicated G-codes, sophisticated graphics functions with 15" screen make programming check easy. TNC-620/640 controller is capable of addressing 5000 blocks and further makes use of hard drive memory for advanced 4 or 5 axis simultaneous control.



Control features for fast contour milling

Feature \ Controller	FANUC			HEIDENHAIN	
	Oi-MF Plus (type 1)	Oi-MF Plus (type 0)	31i-B Plus	TNC-620	TNC-640
Block addressing time	1 ms	0.4 ms	0.2 ms	1.5 ms	0.5 ms
Preview contouring (look ahead blocks)	200	200 (Opt. 400)	1000	5000	5000
Graphic display	10.4"	15" (Opt. 10.4")	15" (Opt. 19")	15"	15" (Opt. 19")
Data storage	5120m (2MB)	5120m (2MB)	10240m (4MB) Opt. 20480m (8MB)	Min. 2GB	Std. 21GB (by SSRD) Opt. 144GB (by HRD)
Memory extension	Std. (CF card, 2GB)	Std. (CF card, 2GB)	Std. (CF card, 2GB)	Opt. (by USB)	N.A.
DATA SERVER	Opt. (by CF Card)	Opt. (by CF Card)	Std.	Std.	Std.
Ethernet link	Std.	Std.	Std.	Std.	Std.
Touch panel	N.A.	Incl.	Incl.	Opt.	Opt. (Std. for 19")
Conversational function	Manual guide I (MGI) + VSS macros	iHMI + MGI + VSS macros	iHMI + MGI + VSS macros	Std.	Std. + SmartNC
Data transfer interface	PCMCIA + USB	PCMCIA + USB	PCMCIA + USB	USB	USB

VICTOR's FANUC Oi-MF Plus (Type 1)/31i-B Plus Control Specifications

Standard

ITEM	SPECIFICATION	DESCRIPTION
Controlled Axes		
1.	Controlled Axes	3 Axes (X, Y, Z)
2.	Simultaneous Controlled Axes	4 Axes
3.	Least Input Increment	0.001 mm / 0.0001 inch / 0.001 deg.
4.	Least Input Increment 1/10	0.0001 mm / 0.00001 inch / 0.0001 deg.
5.	Max. command value	+ 99999.999 mm (± 9999.9999 in)
6.	Inch / Metric Conversion	Std. (G20/G21)
7.	Interlock	All Axes / Each Axis / Cutting Block Start
Operation		
1.	Automatic Operation	Std.
2.	MDI Operation	MDI B
3.	DNC Operation	Reader / Puncher Interface is Required
4.	DNC Operation with Memory Card	PCMCIA Card Attachment is Required
5.	Manual Handle Feed	1 Unit / Each Path
6.	Manual Handle Feed Rate	X1, X10, X100
Interpolation		
1.	Positioning	G00
2.	Exact Stop Mode	G61
3.	Exact Stop	G09
4.	Linear Interpolation	G01
5.	Circular Interpolation	G02, G03 (multi-quadrant is possible).
6.	Dwell	G04
7.	Helical interpolation	Std.
8.	Skip Function	G31
Feed		
1.	Rapid Traverse Rate	Std.
2.	Rapid Traverse Override	F0, 25%, 50%, 100%
3.	Feed Per Minute	G94 (mm/min)
4.	Tangential Speed Constant Control	Std.
5.	Cutting Feed rate Clamp	Std.
6.	Automatic Corner Deceleration	Std. (G64)
7.	Feed rate Override	0~200%
8.	Jog Override	0~100%
9.	Automatic Corner Override	G62.
10.	Feed Stop	Std.
11.	AI contour control (AICC, G05.1) (in total)	200 blocks (AICC-2)
12.	Look-ahead blocks expansion (in total)	1000 blocks (31i)
Program Input		
1.	EIA / ISO Automatic Recognition	Std.
2.	Label Skip	Std.
3.	Parity Check	Std.
4.	Control In / Out	Std.
5.	Optional Block Skip	1
6.	Max. Programmable Dimension	± 8-Digit
7.	Program Number	O4-Digit
8.	Sequence Number	N5-Digit
9.	Absolute / Incremental Programming	G90/G91
10.	(Pocket Calculator Type) Decimal Point Programming	Std.
11.	Input Unit 10 Time Multiply	Std.
12.	Plane Selection	G17, G18, G19
13.	Rotary Axis Designation	Std.
14.	Rotary Axis Roll-Over Function	Std.
15.	Polar coordinate Command	G16.
16.	Coordinate System Setting	Std.
17.	Automatic Coordinate System Setting	Std.
18.	Workpiece Coordinate System	G52, G53, G54~G59
19.	Addition of Workpiece Coordinate System Pair	48 Pairs
20.	Manual Absolute On And Off	Std.
21.	Optional Chamfering/Corner R	Std.
22.	Programmable Data Input	G10
23.	Sub Program Call	4 (0) or 10 (31i) folds nested
24.	Custom macro B	Std.
25.	Addition of Custom Macro Common Variables	#100~#199, #500~#999
26.	Interruption type custom macro	Std.
27.	Canned Cycles For Milling	G73/G74/G76, G80-G89, G98/G99
28.	Small hole peck drilling cycle	G83
29.	Circular Interpolation by R Programming	Std.
30.	Program Format	FANUC std. format
31.	Program Stop / Program End	M00/M01/M02/M30
32.	Reset	Std.
33.	Scaling	G51
34.	Coordinate System Rotation	G68
35.	Programmable mirror image	G50.1
36.	Manual Guide I (MGI) conversational programming	Std.
37.	Optional block skip 9 blocks	Std.
38.	Quick program restart	Std.
39.	Jerk control	Std. (31i)
40.	NURBS interpolation	Std. (31i)

Auxiliary Spindle Speed Function		
1.	Auxiliary Function Lock	Std.
2.	High Speed M / S / T Interface	Std.
3.	Spindle Speed Function	Std.
4.	Spindle Override	50~200%
5.	1st Spindle Orientation	Std.
6.	M Code / S Code / T code Function	M3 / S5 / T2 digit
7.	Rigid tapping	Std.
Tool Function & Tool Compensation		
1.	Tool Function	T8 digit
2.	Tool Offset Pairs	± 6-digit, 400
3.	Tool Offset Memory C	STD (D/H codes are separated)
4.	Tool Length Compensation	G43-G44, G45-G48, G49
5.	Cutting Compensation C	Std.
Accuracy Compensation		
1.	Backlash Compensation	Rapid Traverse / Cutting Feed
2.	Stored Pitch Error Compensation	Std.
Edit Operation		
1.	Part Program Storage Length (in total)	5120m (2MB) (0), 10240m (4MB) (31i)
2.	Number of Registered programs (in total)	1000
3.	Part Program Editing / Protect	Std.
4.	Background Editing	Std.
5.	Memory Card Editing (Max. 1000 programs.)	Std.
Setting and Display		
1.	Clock Function	Std.
2.	Current Position Display	Std.
3.	Program Display	Program name 31 characters
4.	Parameter Setting and Display	Std.
5.	Self Diagnosis Function	Std.
6.	Alarm Display / Operation History Display	Std.
7.	Alarm History Display	50
8.	Help Function	Std.
9.	Run Hour and Parts Count Display	Std.
10.	Actual Cutting Feedrate Display	Std.
11.	Display of Spindle Speed and T Code At All Screens	Std.
12.	Graphic Function	Std.
13.	Dynamic graphic display	Std. (in MGI)
14.	Data Protection Key	Std.
15.	Erase CRT Screen Display	Std.
16.	Machining Condition Selecting Screen	Std.
17.	Color LCD / MDI	10.4" (0), 15" (31i)
Data Input / Output		
1.	Reader / Puncher Interface	RS-232 interface
2.	Memory Card Interface	Std.
3.	Embedded Ethernet (10Mbps)	Std.
4.	USB Device	Std.

OPTIONS

ITEM	SPECIFICATION	DESCRIPTION	
With hardware included		Oi-MF Plus	31i-B Plus
1.	Data server (with PCB and CF card 1GB)	<input type="checkbox"/>	Std. (2GB)
2.	15" LCD with Panel iH (iHM) and touch screen - AI contour control 400 blocks	<input type="checkbox"/>	Std.
3.	Part Program Storage Length 20480m (8MB in total)	N.A.	<input type="checkbox"/>
4.	Ethernet/IP (to be linked to robot)	<input type="checkbox"/>	<input type="checkbox"/>
5.	PROFINET (to be linked to robot)	<input type="checkbox"/>	<input type="checkbox"/>
6.	CC-Link (to be linked to robot)	<input type="checkbox"/>	<input type="checkbox"/>
7.	Fast Ethernet (required for SCADA Web with additional RJ45 port)	<input type="checkbox"/>	<input type="checkbox"/>
8.	5-axis simultaneous control	N.A.	<input type="checkbox"/> (31i-B5 Plus)
Without hardware included			
9.	Tool load monitoring (with Victor own PLC)	<input type="checkbox"/>	<input type="checkbox"/>
10.	Tool retract and return (G10.6 with Victor own PLC)	<input type="checkbox"/>	<input type="checkbox"/>
11.	Addition of work-piece coordinate systems 300 sets	<input type="checkbox"/>	<input type="checkbox"/>
12.	Bi-directional Pitch Error Compensation	<input type="checkbox"/>	<input type="checkbox"/>
13.	Cylindrical interpolation (G7.1) (used on 4th axis) - by plane distance command	Std.	<input type="checkbox"/>
14.	Exponential interpolation (G2.3)	N.A.	<input type="checkbox"/>
15.	Conical/spiral interpolation	N.A.	<input type="checkbox"/>
16.	Polar coordinate interpolation	N.A.	<input type="checkbox"/>
17.	Floating reference position return	N.A.	<input type="checkbox"/>
18.	Hypothetical axis interpolation (G07)	N.A.	<input type="checkbox"/>

*1. Fanuc "Manual Guide I" is only available on 10.4" screen.

Machine Specification


Item \ model	Units	Vcenter-205	
Travel	X axis travel	mm	2050
	Y axis travel	mm	550
	Z axis travel	mm	560
Distance	Spindle center to column	mm	638
	Spindle nose to table surface	mm	180 ~ 740
Table	Table work area	mm	2500 x 550
	Dimension of T-slot	mm	5 x 18 x 100
	Max. table load	kg	1200
Spindle	Spindle taper		BT-40
	Spindle motor - cont / 30 / 10 min	kW	7.5 / 11 / 15 (opt. 15 / 18.5 / -)
	Spindle speed	rpm	12000
Feed rate	Rapid feed rate - X/Y/Z	m/min	30 / 30 / 30
	Axis feed motor - X/Y/Z	kW	4 / 3 / 4
	Cutting feedrate by table	m/min	20
	X ballscrew diameter	mm	50
	Y ballscrew diameter	mm	40
	Z ballscrew diameter	mm	40
	Linear guide width (X/Y/Z)	mm	45 / 45 / 45
Tools	Max. tool length	mm	350
	Max. tool weight	kg	8
	Magazine capacity		24 disc (opt. 32, 40)
	Max. tool diameter (without adjacent tools)	mm	ø80 (ø127)
	Tool exchange time	sec.	2.9 (T-T), 7.2 (C-C)
	Pull stud angle	deg.	15
	Tool selection method		Random
Machine	Power requirement	kVA	40 (excl. CTS)
	Air pressure requirement	kg/cm ²	5.5 ~ 6.5
	Coolant tank capacity	L.	600
	Std. NC controller		Fanuc 0i-MF Plus (10.4")
	Floor space requirement	mm	5300 x 3430
	Max. machine height	mm	3045
	Machine weight	kg	9840

Standard accessories

- Chip conveyor with cart
- Air dryer for DCS spindle
- Central partition system
- Fully enclosed splash guard
- Rigid tapping
- Remote MPG
- Hand tools and toolbox
- T nuts for table slot
- Built-in work light
- Auto power off system
- Leveling blocks
- Air conditioner for electric cabinet
- Moving CRT

Optional accessories

- Spindle oil cooler
- High-powered spindle motor
- Coolant through spindle
- Linear scale (X-axis)
- Auto tool length measurement
- Stop block for special tool
- 4th/5th axis interface
- Hydraulic interface
- Rotary tables
- 32, 40 tool magazine
- Workpiece measurement
- Table shower system
- Auto door
- Fanuc 31i or Heidenhain TNC-640 control
- SK-40 / CAT-40 tooling system
- 2-door design

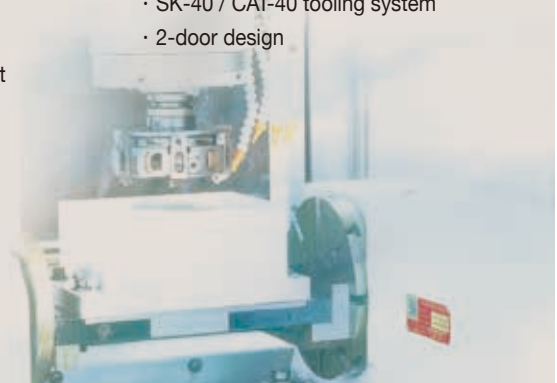



ONWARD RISE

To ensure the return on investment, Victor Taichung has invested considerably in setting up a distribution network in terms of global vision local touch for our sales and service supports worldwide. Besides the qualified exclusive agents around the world, Victor Taichung has 7 overseas subsidiaries to provide our customers efficient after-sales service and technical supports.




Vcenter-AX800



Vcenter-P136



Vcenter-H500/H500HS

 **VICTOR TAICHUNG** profile:
 Sales turnover: USD 140 mil's (in 2023)*
 No. of employees: 735
 *Exchange rate: 1 USD=30 TWD.



THE VICTOR-TAICHUNG COMPANIES

TAIWAN

http://www.victortaichung.com
 E-mail :info@mail.or.com.tw
 Victor Taichung Machinery Works Co., Ltd.
 No. 1, Jingke Central 2nd Rd.,
 Nantun Dist., Taichung 40852,
 TAIWAN, R.O.C.
 TEL : 886-4-23592101
 FAX : 886-4-23593389

FRANCE

Victor France
 TEL : 33-1-64772000
 FAX : 33-1-64772063

GERMANY

Victor GmbH
 TEL : 49-2261-478434
 FAX : 49-2261-478327

SOUTH AFRICA

Victor Fortune (PTY) Ltd.
 TEL : 27-11-3923800
 FAX : 27-11-3923899

MALAYSIA

Victor Machinery (M) SDN. BHD.
 TEL : 60-3-56337180
 FAX : 60-3-56337191

THAILAND

Victor CNC (Thailand) Co., Ltd.
 TEL : 66-2-9263735
 FAX : 66-2-9032373

INDONESIA


PT. Victor Machinery Indonesia
 TEL : +62-21-88958504
 FAX : +62-21-88958513

USA

Fortune International Inc.
 TEL : 1-732-2140700
 FAX : 1-732-2140701

CHINA

Victor Taichung Machinery (Shanghai)
 TEL : 86-21-59768018
 FAX : 86-21-59768009



HTL VTL VMC HMC XMT PIM